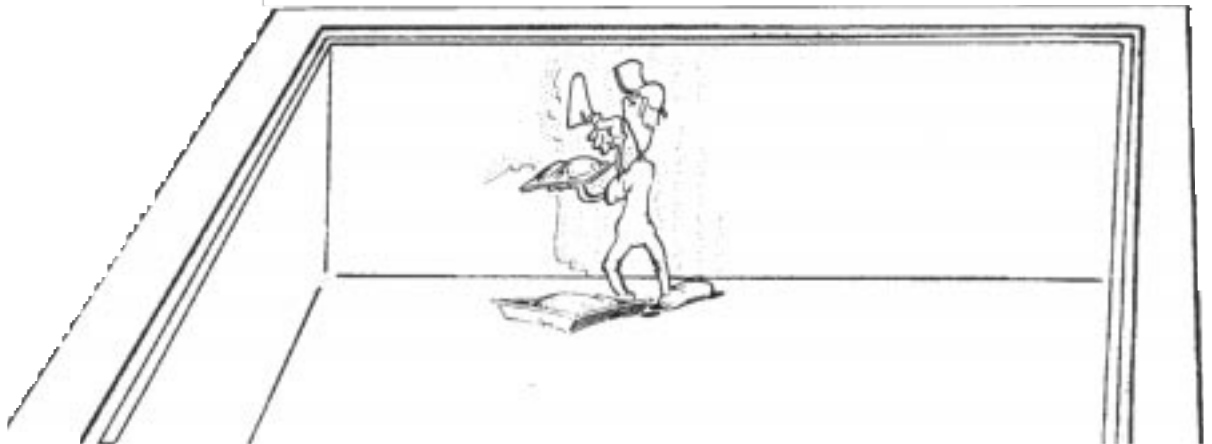


**SIDER****SIDERPOOL****OXYDRO**

Description	SiderPool is an integrally colored trowel coat finish for applications on the surface of concrete swimming pools.												
Use	SiderPool is an exterior colored plastered finish coat for newly constructed concrete swimming pools or where a superb water-resistant coating is required.												
Specifications	<table><tr><td>Mix density</td><td>1.7</td></tr><tr><td>Water retention</td><td>85%</td></tr><tr><td>Adherence</td><td>160 psi -1.1 MPa</td></tr><tr><td>Flexural strength</td><td>507 psi - 3.5 MPa</td></tr><tr><td>Compressive strength</td><td>2175 psi - 15 MPa</td></tr><tr><td>Elasticity modulus</td><td>9000 MPa</td></tr></table>	Mix density	1.7	Water retention	85%	Adherence	160 psi -1.1 MPa	Flexural strength	507 psi - 3.5 MPa	Compressive strength	2175 psi - 15 MPa	Elasticity modulus	9000 MPa
Mix density	1.7												
Water retention	85%												
Adherence	160 psi -1.1 MPa												
Flexural strength	507 psi - 3.5 MPa												
Compressive strength	2175 psi - 15 MPa												
Elasticity modulus	9000 MPa												
Surface Preparation	Surface must be clean and free of all bond inhibiting material including release agents. Dampen the surface. Prime the surface with SiderResin-M.												
Mixing Instruction and Application Procedures	Mix one bag of SiderPool with 5 quarts (5 liters) of clean, potable water. Mix in a clean standard batch mixer. Do not over mix. Allow the mix to settle for a few minutes before applying. Apply with a trowel or spray equipment. To obtain a very slick surface to reduce algae growth, SiderPool may be sanded after fully drying. Sand until desired smoothness is achieved. Application thickness ranges from 1/4" (6 mm) to 3/8" (9 mm).												
Limitations	Do not apply in direct sun light or to an excessively dry or frozen surface. Protect from rain, freezing and thawing surfaces. Avoid application during strong winds to avoid desiccation.												
Coverage	20 f ² (2 m ²) at a 1/4" (6 mm) thickness.												
Packaging	55lb. (25 kg) bag.												
Colors	Iceberg white, Ivory Coast, Mediterranean blue and Bahamas pink.												
Storage and Shelf Life	Shelter in a dry environment from direct sunlight, extreme heat, rain and freezing. Shelf life is one year in original sealed packaging.												

Sider-Oxydro products are specifically formulated and designed to meet and exceed industry standards. Please refer to technical data sheets for specific installation instructions or contact Sider-Oxydro for application questions.