


SIDER

**SIDERPROOF-FF
SIDERPROOF-FHF**

OXYDRO

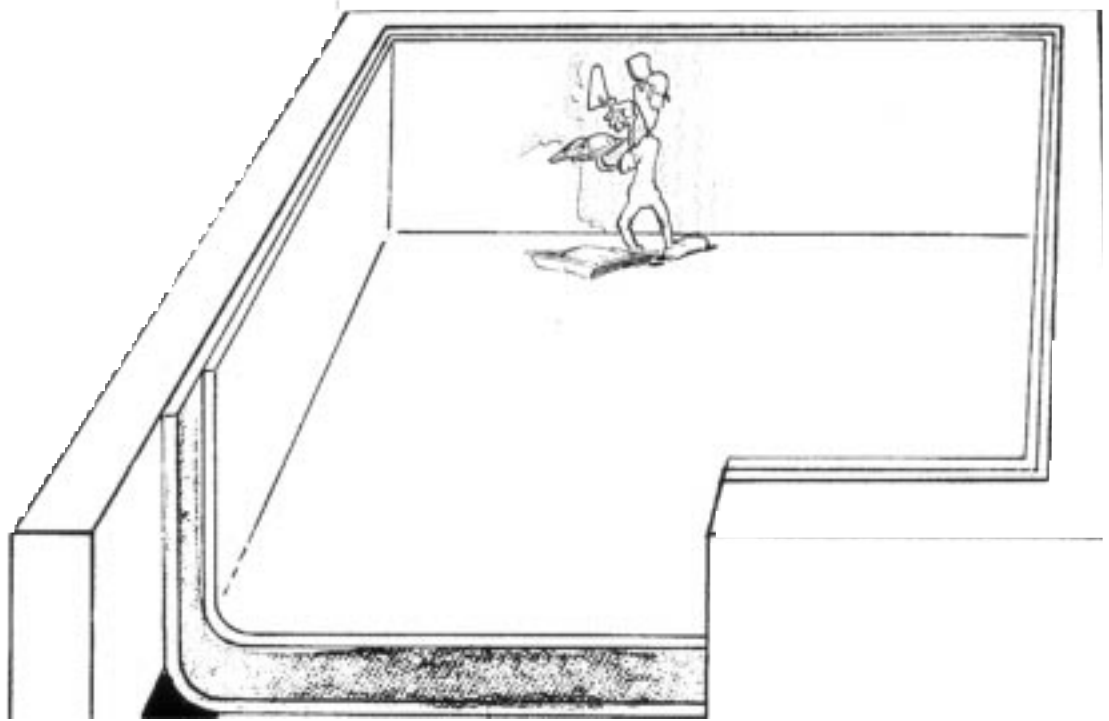

Description

SiderProof-FF (food-grade and flexible) and SiderProof-FHF (food-grade and highly flexible) are durable, cementitious waterproofing coating designed for use over concrete surfaces. The natural solution for waterproofing, SiderProof-FF and SiderProof-FHF features the additional benefits of:

- ↻ Exceptional flexibility
- ↻ A food grade approved waterproof coating
- ↻ For use in both above & below grade applications
- ↻ Apply with a standard paint roller or paint brush
- ↻ Simple & easy kit to mix

This exceptional, state-of-the-art, waterproofing system provides long-lasting, superior waterproofing for concrete surfaces.

Use


SiderProof-FF and SiderProof-FHF is applied over concrete surfaces as the waterproofing coating for both above & below grade applications and is food grade approved for use in food handling areas.

Composition

Portland cements, sand, bonding agents, mineral additives, stabilizers and non-synthetic additives.

Surface Preparation

Surfaces must be free of all bond-inhibiting materials including dirt, efflorescence, release agents and any other foreign particles. Remove paint, loose or damaged materials by water blasting, pressure washing, sandblasting or mechanical wire brushing.

**SIDER****SIDERPROOF-FF
SIDERPROOF-FHF****OXYDRO***CONTINUED***Limitations**

Apply when ambient temperature is above 41° F (5° C) and below 90° F (32° C). For applications outside of these temperature ranges, please contact Sider-Oxydro, Inc. technical support for additional information.

**Mixing Instructions
and Application
Procedures**

Always pour liquid component in first and then mix with powder for optimal results.

One kit of SiderProof-FF or SiderProof-FHF consists of 1 - 44 lb. (20 kg) bag of powder and 1 - 1.3 gallon (5.9 liter) container of liquid. Pour the SiderProof-FF or SiderProof-FHF liquid into a clean bucket and then add the full bag of powder.

Mix with a drill mixer for no less than 5 minutes to yield good plasticity and homogeneous mix. Do not re-temper the material nor use partially set or frozen material in the mix.

Apply SiderProof-FF or SiderProof-FHF with a large clean paintbrush. Apply evenly in 2 coats, with a minimum of 6 hours between coats (dependant upon ambient temperature). Cover entire surface to ensure complete waterproofing. Drying period is a minimum of 24 hours before back filling in below grade applications.

Coverage

75 f² (6.97 m²) of coverage per kit, when applied in 2 coats.

Packaging

1 - 44 lb. (20 kg) bag of powder and 1 - 1.3 gallon (5.9 liter) container of liquid.

Storage and Shelf Life

Shelter in a dry environment from direct sunlight, extreme heat, rain and freezing. Shelf life is one year in original sealed packaging.

Sider-Oxydro products are specifically formulated and designed to meet and exceed industry standards. Please refer to technical data sheets for specific installation instructions or contact Sider-Oxydro for application questions.