

SIDER

SIDERROOF

OXYDRO

Description


SiderRoof is a seamless elastomeric waterproof roof coating.

Use

This unique system that combines strength and flexibility to protect inaccessible roofs, wood roofing or cement based roofing systems against severe weather and pollutants. SiderRoof can also be used for repairs in cracks.

Specifications

| | |
|--------------------------|--|
| Density | 1.4 |
| Setting time | 48 hours |
| Dry extract | 65% + 5% |
| Waterproof property | Complete |
| Stretching capacity | 300% (may vary according to thickness and reinforcement used for crack repair) |
| Crack resistance | 2 mm |
| Water vapor permeability | .25 X 10 - 9 kg / m ² / h |

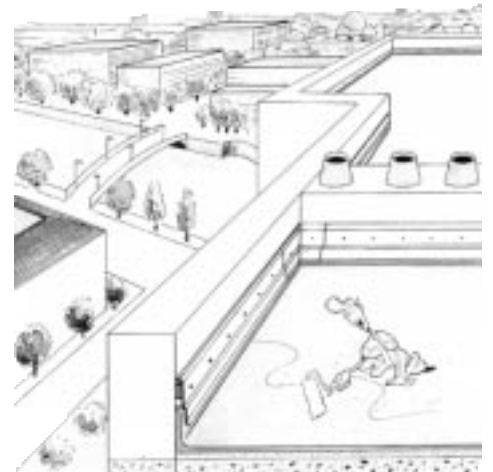

Surface Preparation

Surface must be clean and sound. Surface may be slightly damp, but not wet. SiderRoof may be applied without a primer over a non porous surface, however, a porous surface will require an impression coat of SiderRoof by diluting SiderRoof with a mixture of 80% SiderRoof and 20% clean, potable water.

Application Procedures

SiderRoof is a two-coat application process. Simply apply the first coat of SiderRoof with a standard paint brush or paint roller, completely covering the entire roof surface. Allow this coat to dry for 24 hours. Next, reinforce all angles and cracks with a non-woven, polyester mesh, and then apply the second coat of SiderRoof.

Coverage

100 f² (9.29 m²) per 55 lb. (25 kg) pail.

Packaging

55lb. (25kg) pail.

Colors

Gray, black, terra-cotta red, white and straw yellow.

Storage and Shelf Life

Shelter in a dry environment from direct sunlight, extreme heat, rain and freezing. Shelf life is one year in original sealed packaging.

Sider-Oxydro products are specifically formulated and designed to meet and exceed industry standards. Please refer to technical data sheets for specific installation instructions or contact Sider-Oxydro for application questions.