



LEAD LINED ACCESS DOOR Model KATR For Drywall Ceilings



KARP ASSOCIATES, INC.

DATE

SPECIFICATIONS

GENERAL SCOPE:

Access doors shall be Karp Type KATR as manufactured by Karp Associates, Inc., Melville, N.Y. Sizes shall be as indicated on the drawings.

CONSTRUCTION:



1. Frame shall be 16 gage steel and doors all be 18 gage steel.
2. Door shall be recessed 1 1/2" to accommodate double thickness of wall board.
3. Hinge shall be exposed, continuous piano hinge.
4. Locks shall be flush and screwdriver operated with 1 1/2" cam and lock studs, or shall be key operated cylinder lock with automatic dust shutter. Furnished with plastic grommet for studs only to protect hole made in wall board.
5. Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel.
6. Sheet metal meets National Council of Radiation Protection #49.
7. Varying thicknesses of lead available. Custom door sizes also available.

STANDARD SIZES

| DOOR SIZE H X W (IN.) | WALL/CEILING OPENING (IN.) | NUMBER OF LATCHES | SHIP WT. (LBS.) |
|--------------------------|-------------------------------|----------------------|--------------------|
| 12 x 12 | 10 1/2 x 10 1/2 | 1 | 6.7 |
| 18 x 18 | 16 1/2 x 16 1/2 | 2 | 11.6 |
| 24 x 24 | 22 1/2 x 22 1/2 | 2 | 18.1 |
| 30 x 22 | 28 1/2 x 20 1/2 | 2 | 19.5 |

| PROJECT DATA | | | | | |
|-----------------------|--|--|--|--|--|
| Project Name: | | | | | |
| Architect: | | | | | |
| Contractor: | | | | | |
| Agent/Customer Name: | | | | | |
| Tagging Instructions: | | | | | |
| Special Instructions: | | | | | |

| PROJECT SCHEDULE | | | | | |
|------------------|---|---|----------------|--------|---------|
| Qty. | H | W | No. of Latches | Finish | Remarks |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

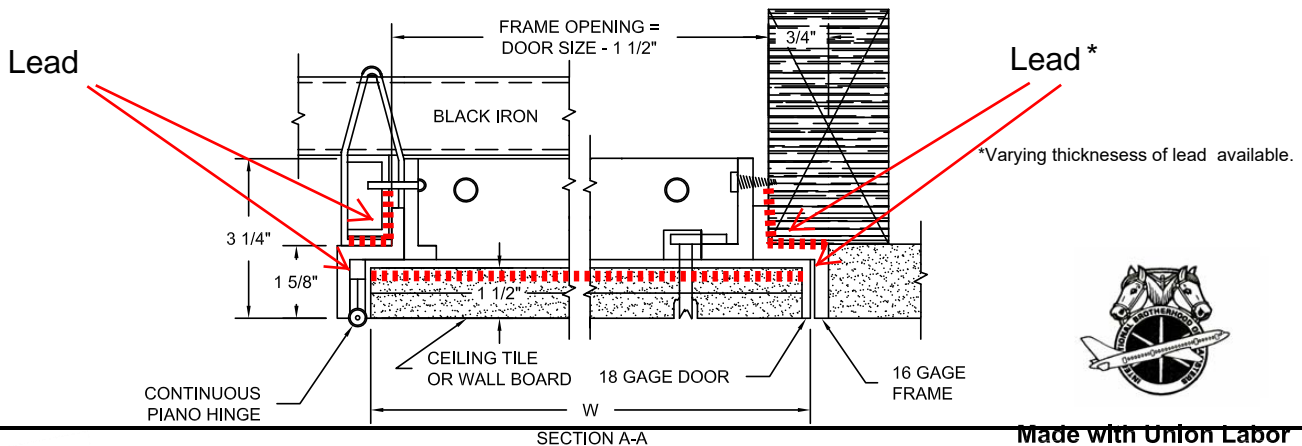

Made with Union Labor



FOR MORE INFORMATION CALL 1-888-926-1365
 Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com