


The Steel Network, Inc.

VertiClip® SLT

## VertiClip® SLT


Structure/Slab Bypass

The Steel Network, Inc. 

### Material Composition

ASTM A1003/A1003M Structural Grade 50 (340) Type H, ST50H (ST340H): 50ksi (340MPa) minimum yield strength, 65ksi (450MPa) minimum tensile strength, 97mil minimum thickness (12 gauge, 0.1017" design thickness) with ASTM A653/A653M G90 (Z275) hot dipped galvanized coating.

The attachment of VertiClip to the primary structure may be made with PAF, screw/bolt anchors, or weld and is dependent upon the base material (steel or concrete) and the design configuration.

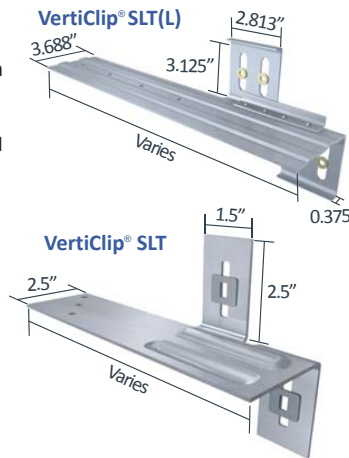

US Patents #5,467,566 & #5,906,080


### VertiClip SLT Allowable (Unfactored) Loads<sup>1</sup>

VertiClip® SLT, Recommended Allowable Load (lbs): F1 & F2												
Stud		F1 Load Direction			F2 Load Direction							
		SLT9.5	SLT(L)12, SLT(L)15 & SLT(L)18		SLT-9.5	SLT(L)12		SLT(L)15		SLT(L)18		
Thickness Mils (ga)	Yield Strength (ksi)	w/2 #12 screws	w/2 #12 screws	w/4 #12 screws	w/2 #12 screws	w/2 #12 screws	w/4 #12 screws	w/2 #12 screws	w/4 #12 screws	w/2 #12 screws	w/4 #12 screws	
33 (20)	33	190	190	380	376	376	754	376	744	376	700	
33 (20)	50	275	275	452	510	544	903	544	744	544	700	
43 (18)	33	248	248	452	510	560	903	560	744	560	700	
43 (18)	50	341	359	452	510	810	903	744	744	700	700	
54 (16)	33	312	312	452	510	789	903	744	744	700	700	
54 (16)	50	341	450	452	510	903	903	744	744	700	700	
68 (14)	50	341	452	452	510	903	903	744	744	700	700	
97 (12)	50	341	452	452	510	903	903	744	744	700	700	
<b>Max Allowable Clip Load</b>		<b>341</b>	<b>452</b>	<b>452</b>	<b>510</b>	<b>903</b>	<b>903</b>	<b>744</b>	<b>744</b>	<b>700</b>	<b>700</b>	

### Notes:

- VertiClip SLT series is designed to support horizontal loads and must not be used in axial-load-bearing wall construction.
- Allowable loads have not been increased for wind, seismic, or other factors.
- #12 screws are provided with each Step Bushing.
- VertiClip SLT allows up to 2" of vertical deflection (1" up and 1" down).
- VertiClip SLT(L) allows up to 1.875" of vertical deflection (0.938" up and 0.938" down)
- <sup>1</sup> For LRF Design Strengths refer to ICC-ESR-2049.

### Load Direction

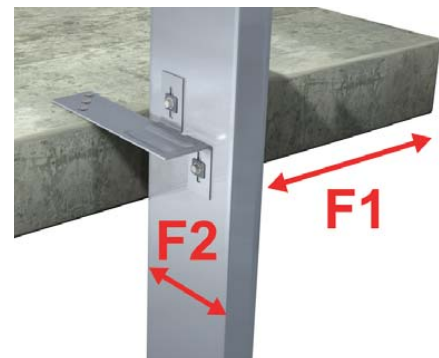

### Nomenclature

VertiClip SLT is available in a length of 9 1/2". VertiClip SLT(L) is available in lengths of 12", 15", and 18". Determine length by adding stud + offset + 3" for steel (5.5" for concrete) and selecting the next largest size.

**Example:** 6" stud, 4" offset + 3"

**Designate:** VertiClip® SLT(L)15

102014 | The Steel Network, Inc.

VertiClip® SLT



**FOR MORE INFORMATION CALL 1-888-926-1365**  
 Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • [www.sssupply.com](http://www.sssupply.com)

The Steel Network, Inc.

VertiClip® SLT

**Example Details**



VertiClip SLT attached to the underside of wide flange beam.

---

