



ADWT

SPECIALTY DOORS

Airtight/Watertight

Application

- This access door is ideal for use in laboratories, clean rooms, operating rooms, etc. where an airtight/watertight seal is required

Product Features

- ADWT is a flush access door that has been tested for air infiltration and water penetration
- Door and Frame fully welded
- Continuous Bulb Trim Gasket
- Continuous Stainless Steel Piano Hinge
- Air Infiltration : less than 0.01 cfm/sq foot – ASTM E 283
- Water Penetration : no leakage at 15.05 psf – ASTM E 331

ADWT Access Door Specifications:

Door / Door Frame: Flush to frame with reinforced edges
 Stainless Steel or Steel: 16 gauge door; 16 gauge mounting frame

Hinge: Continuous exposed stainless steel piano hinge

Gasket: Continuous Bulb Trim Seal

Standard Latch: Stainless Steel phillips head screws standard

Optional Latches/Locks: stainless steel allen head screws, stainless steel spanner head screws, torx, cylinder lock & key

Finish: Steel: 5-stage iron phosphate preparation with prime coat of White alkylid baking enamel OR Stainless Steel: Type 304 – #4 satin polish




ADWT STANDARD SIZES

(other sizes available upon request)

Nominal Door Size W&H		Weight per Door	
inches	mm	lbs.	kg.
12 x 12	305 x 305	8	3.6
14 x 14	356 x 356	11	5
18 x 18	457 x 457	15	6.8
24 x 24	610 x 610	22	10
24 x 36	610 x 914	29	13.1
30 x 30	762 x 762	32	14.5
30 x 48	762 x 1219	44	20

Wall or ceiling opening is W + 3/8" (9 mm)
 For detailed specifications see submittal sheet

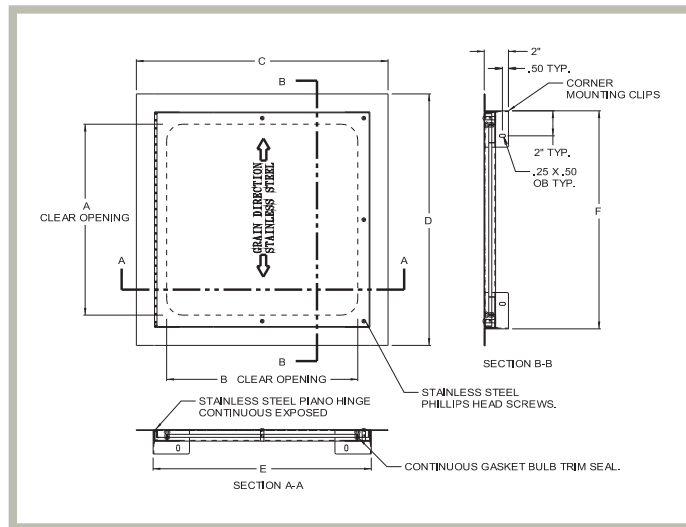

This document contains proprietary information which is the property of Acudor Products. It shall not be modified, copied, furnished, nor distributed (in whole or in part) without proper authorization. Copyright © 2020 Acudor Products.



FOR MORE INFORMATION CALL 1-888-926-1365
 Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com