


# Drywall Accessories

## Bullnose Arch

| Product #        | Dimensions/Descriptions             | Pieces/Box |
|------------------|-------------------------------------|------------|
| 208A             | 5/8" flange - one leg slotted.      | 50         |
| 208HA            | 1" flange - one leg slotted.        | 50         |
| 208HIA           | 1" offset flange - one leg slotted. | 50         |
| 8' & 10' Lengths |                                     |            |
| Product #        | Dimensions/Descriptions             | Pieces/Box |
| C208A            | Coiled bullnose arch bead.          | 100'       |

208A

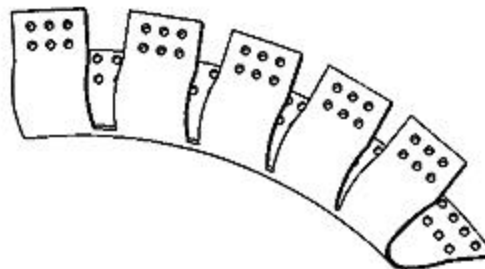


### Application: 208A

An ideal solution for hard to do arches. Fast installation. Excellent tape and drywall mud adhesion. Will not kink. 8' and 10' lengths.

### Application: 208HA

Designed to provide a more "open" radius. Shallow shoulder allows for a thinner veneer finish. Mudding flange is full 1" wide. 8' and 10' lengths.


208HA

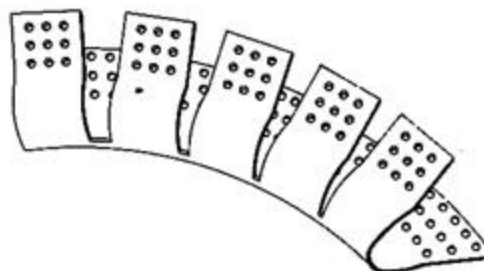

### Application: 208HIA

Dual purpose Bullnose can be used for either interior or exterior applications. Wider flange and "raised" shoulder will accept thicker finishes. Flange is a full 1" wide. 8' and 10' lengths.

208HIA

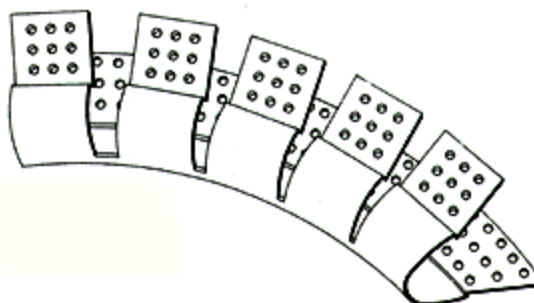


### Application: C208A (Coiled)

Same product as regular 208A, except coiled in 100' rolls for convenience in transporting and less waste.

### Specification:

Arched Bullnose products shall be Plastic Components, Inc. # \_\_\_\_\_. All drywall accessories shall conform to ASTM standards D3678-92 and C1047-94. Finish compatible with drywall mud and all paint finishes. They shall be used where specified by the architect and installed per industry standards and manufacturer's instructions.

C208A

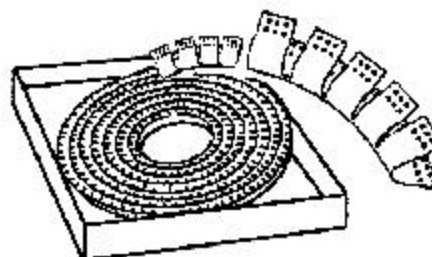

It is recommended that PVC products be used for all interior applications.

