



Drywall Accessories

Continuous Soffit Vent

Product#	Dimensions/Descriptions	Dimension "A"	Pieces/Box
548-38	2-5/8" wide vented area, can be used with any sheathing product. 14 square inches of free air flow per linear foot.	3/8"	13
548-50		1/2"	13
548-58		5/8"	13
548-75		3/4"	13
3548-50	3" wide vented area, can be used with any sheathing product. 15 square inches of free air flow per linear foot.	1/2"	13
3548-58		5/8"	13
4548-50	4" wide vented area, can be used with any sheathing product. 16 square inches of free air flow per linear foot.	1/2"	13
4548-58		5/8"	13
10' Lengths			

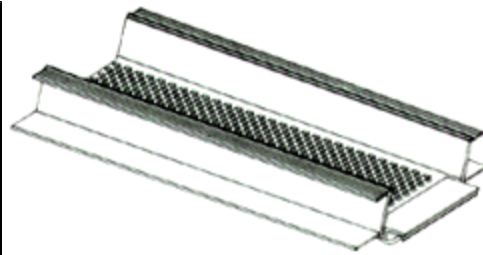

Note: Striations on exposed flanges.

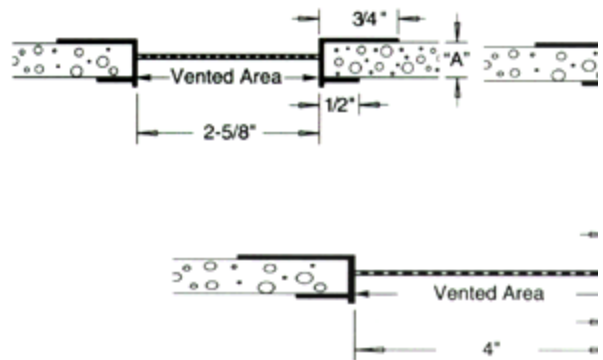

Application:

Designed specifically for sheathing products. Has a built in stop (1/8") to assure proper base thickness as well as maintaining a clean finish edge. The stop flange is serrated for positive material bond. Available in three widths. Will not rust, excellent paint adhesion. Connector clips are provided to eliminate sagging at butt joints.

Specification:

Soffit Vent shall be Plastic Components, Inc. # _____. All drywall accessories shall conform to ASTM standards D3678-92 and C1047-94. They shall be used where specified by the architect and installed per industry standards and manufacturer's instructions.

It is recommended that PVC products be used for all interior applications.