


# Drywall Accessories

## Sheathing Slip Joint

Product #	Dimensions/Descriptions	Pieces/Box
DW500-50	Slip joint. Can be used with any sheathing product.	15
DW500-58	Opens from 1 -1/4" to 1 -3/4".	15
10' Lengths		

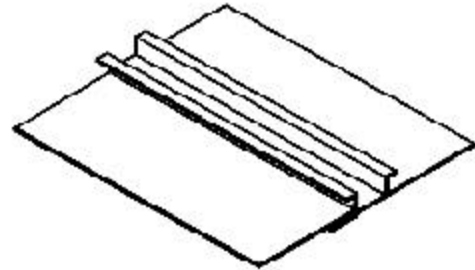


### Application:

A two piece slip joint for sheathing products. Designed for areas where unusual movement is anticipated. Part must be installed before drywall is firmly attached. May be installed in either a vertical or horizontal application.


### Specification:

Sheathing Slip Joint shall be Plastic Components, Inc. # \_\_\_\_\_. All drywall accessories shall conform to ASTM standards D3678 -92 and C1047 -94. Finish compatible with drywall mud and all paint finishes. They shall be used where specified by the architect and installed per industry standards and manufacturer's instructions.

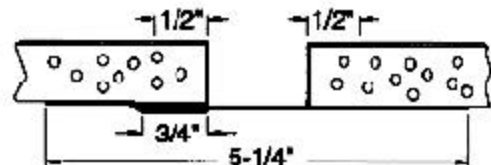

## Control Joint - PL093

Product #	Dimensions/Descriptions	Pieces/Box
PL093 -16	Inverted 1/2" expansion joint. 1/16" finish stop.	60
10' Lengths		

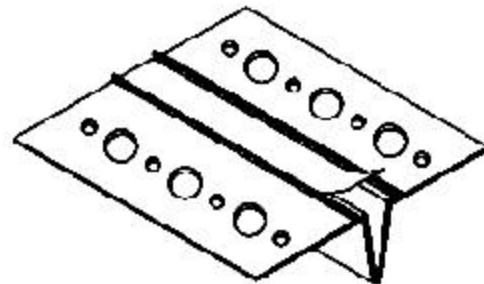

### Application:

Flexible control joint for use in wall and ceiling design to control movement. Has removable tape to protect "V" groove during installation. Flanges have holes to insure positive bond of drywall mud to surface of board. Has built in 1/16" stops to insure proper drywall mud thickness. Flanges are placed on top of two separated sheets of sheathing with "V" groove placed between separated board.



### Specification:

Control Joint PL093 shall be Plastic Components, Inc. # PL093-16. All drywall accessories shall conform to ASTM

standards D3678-92 and C1047-94. Finish compatible with drywall mud and all paint finishes. They shall be used where specified by the architect and installed per industry standards and manufacturer's instructions.

It is recommended that PVC products be used for all interior applications.

