


Exterior Insulated Finishes

Control Joint

Product #	Finish Thickness	Pieces/Box
2027-16	1/16"	60
2027-25	1/4"	35
2027-38	3/8"	25
2027-50	1/2"	25
10'Lengths		

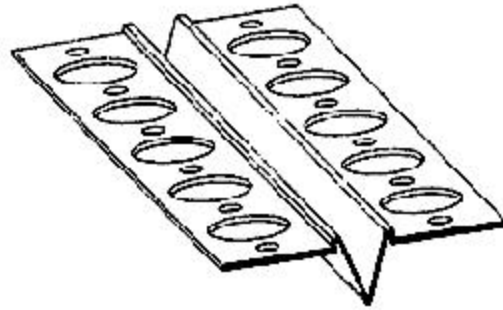


Application:


To relieve stress caused by expansion and contraction within the system. This PVC deep groove "V" control joint is the most economical answer. Control joint should be placed at 144 sq. ft. intervals. Removable tape keeps the "V" clean during installation. Excellent paint adhesion.

Specification:

Control Joint shall be Plastic Components, Inc. # _____. All exterior accessories shall conform to ASTM standards D1784-92 and C1063-94. They shall be used where specified by the architect and installed per industry standards and manufacturer's instructions.

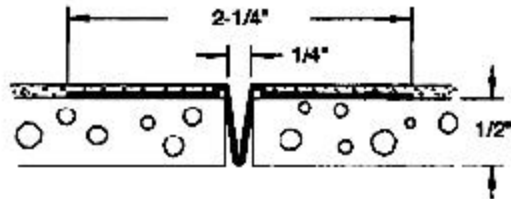

2027-16

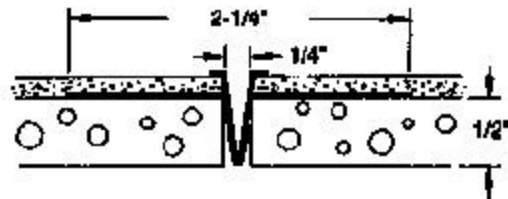

2027-25
2027-38

Caulk all butt joints, intersections and ends.
It is recommended that PVC products be used for all exterior exposures.

