

# Exterior Insulated Finishes

## Window / Door Head Flashing



Product #	Pieces/Box
WDA-75	30
WDA-1	30
WDA-1.5	30
WDA1.75	30
WDA-2	30
10' Lengths	

### Application:

A 3 1/2" wide flange head flashing for windows or doors. Positive angled to move any incidental moisture away from the structure. Nailing flange is pre-slotted to reduce labor when an arched condition exists.

### Specification:

Window/Door Drip Edge shall be Plastic Components, Inc. #\_\_\_\_\_. All exterior products shall conform to ASTM standards D1784-92 and C1063-94. They shall be used where specified by the architect and installed per industry standards.

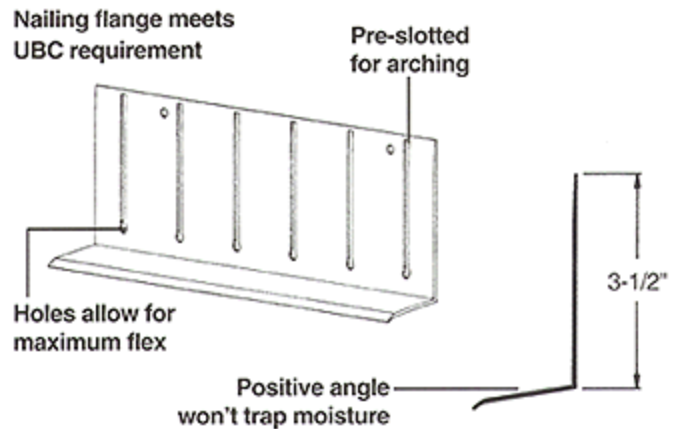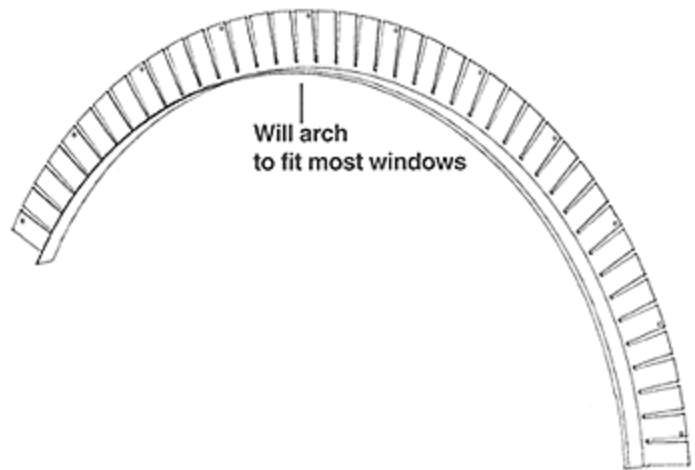

Caulk all butt joints, intersections and ends.  
It is recommended that PVC products be used for all exterior exposures.

