



Stucco and Plaster

Corner Bead


Product#	Dimensions/Descriptions	Pieces/Box
1A	2-1/2" x 2-1/2" legs.	50
1B	1-1/2" x 1-1/2" legs.	50
2	2-3/4" x 2-3/4" legs.	50
3	2-1/2" x 1-1/2" legs.	50
8' & 10' Lengths		

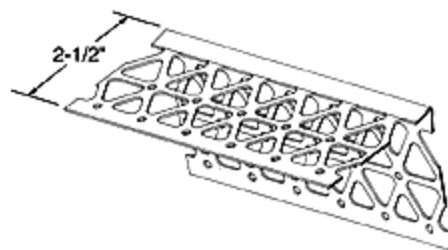


1A

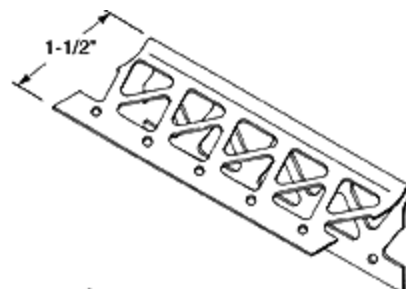

1B

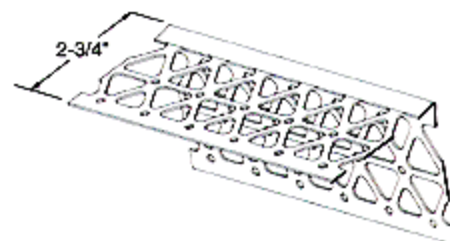

2

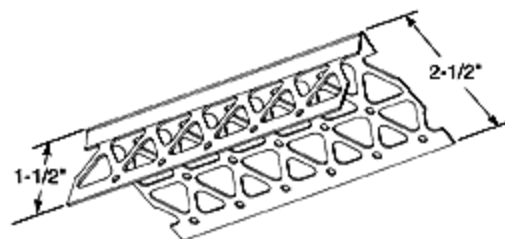


3

Application:

Provides a rust proof, high impact resistant non-kinking corner. The design of the hole pattern in the flanges allow the stucco to flow through forming a solid layer and giving the corner extra strength. **New** and **larger** holes in the nailing flange make it easier to adjust and align the bead before final attachment.

Specification:

Corner Bead shall be Plastic Components, Inc. # _____. All exterior trims shall be of PVC material conforming to ASTM standards D1784-92 and C1063-94. They shall be used where specified by the architect and installed per industry standards and manufacturer's instructions.

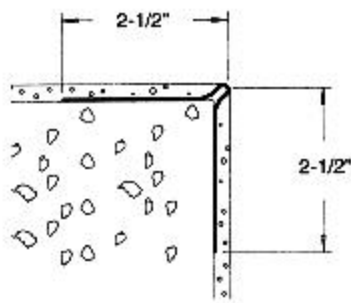

Caulk all butt joints, intersections and ends.
It is recommended that PVC products be used for all exterior exposures.

