

Direct Applied Finishes

Angle Termination Bead



Product #	Pieces/Box
2221-45	100
10'Lengths	

● Application:

A surface mounted 45 degree angled bead that can be used around windows, doors or any termination point as a backing for perimeter sealant application. All exposed surfaces have striations that provide positive bonding of caulk and base material. Angled portion is 5/8" wide; surface flange is 1-3/4" wide and has a built in 1/8" stop to assure proper base and finish thickness.

● Specification:

Angled Termination Bead shall be Plastic Components, Inc. # 2221-45. All exterior accessories shall conform to ASTM standards D1784-92 and C1063-94. They shall be used where specified by the architect and installed per industry standards and manufacturer's instructions.

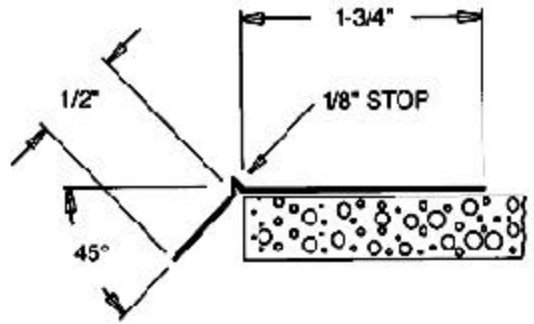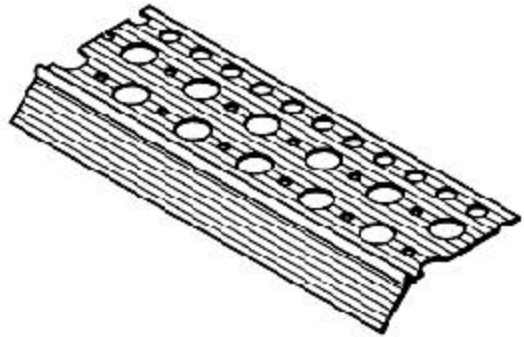

Caulk all butt joints, intersections and ends.
It is recommended that PVC products be used for all exterior exposures.

