
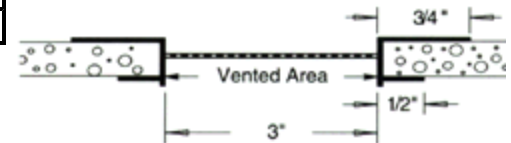
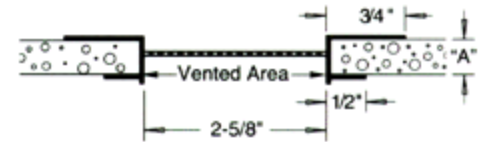


Direct Applied Finishes

Continuous Soffit Vent

Product#	Dimensions/Descriptions	Dimension "A"	Pieces/Box
548-38	2-5/8" wide vented area, can be used with any sheathing product. 14 square inches of free air flow per linear foot.	3/8"	13
548-50		1/2"	13
548-58		5/8"	13
548-75		3/4"	13
3548-50	3" wide vented area, can be used with any sheathing product. 15 square inches of free air flow per linear foot.	1/2"	13
3548-58		5/8"	13
4548-50	4" wide vented area, can be used with any sheathing product. 16 square inches of free air flow per linear foot.	1/2"	13
4548-58		5/8"	13
10' Lengths Connector clips included.			

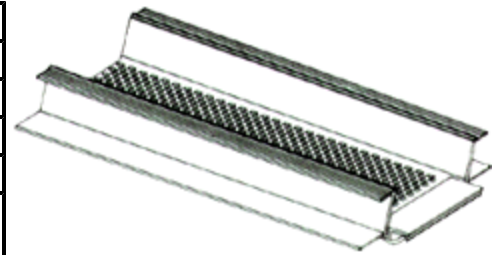

Application:

Designed specifically for sheathing products. Has a built in stop (1/8") to assure proper base and finish thickness as well as maintaining a clean finish edge. The stop flange is serrated for positive material bond. Available in three widths. Will not rust, excellent paint adhesion. Connector clips are provided to eliminate sagging at butt joints.

Specification:

Soffit Vent shall be Plastic Components, Inc. # _____. All exterior accessories shall conform to ASTM standards D1784-92 and C1063-94. They shall be used where specified by the architect and installed per industry standards and manufacturer's instructions.

Caulk all butt joints, intersections and ends.

It is recommended that PVC products be used for all exterior exposures.