

Direct Applied Finishes

Control Joint



Product #	Dimension "A"	Pieces/Box
2250	1/2"	25
2258	5/8"	20
10'Lengths		

● Application:

Designed for either vertical or horizontal application. Sheathing board slides in between nailing flange and perforated "wings". "Wings" have stops to ensure a clean, straight line during application of ground coat and finish. Perforations assure positive bond of ground coat to substrate. Removable tape keeps "V" clean during installation.

● Specification:

Control Joint shall be Plastic Components, Inc. # _____. All exterior accessories shall conform to ASTM standards D1784-92 and C1063-94. They shall be used where specified by the architect and installed per industry standards and manufacturer's instructions.

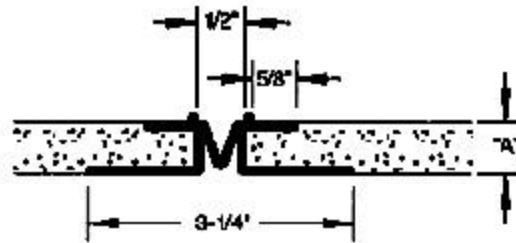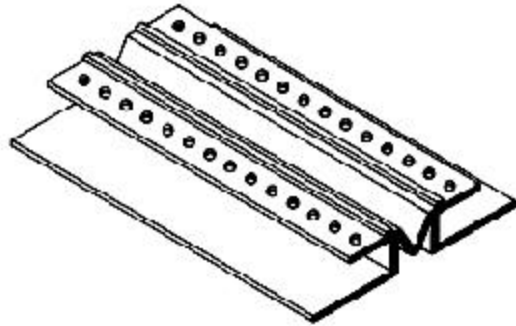

Caulk all butt joints, intersections and ends.
It is recommended that PVC products be used for all exterior exposures.

