

# Direct Applied Finishes

## Control Joint



| Product #  | Ground Inches | Pieces/Box |
|------------|---------------|------------|
| 22027-16   | 1/16"         | 50         |
| 10'Lengths |               |            |

### ● Application:

Designed to be installed between two separated sheets of sheathing board. It has a full 1-1/2" wide flange that rests on top of the sheathing board. The flanges have striations and perforations assure positive keying and bonding of the ground coat. The removable tape will keep the deep "V" clean during installation.

### ● Specification:

PVC Control Joint shall be Plastic Components, Inc. # 22027-16. All exterior accessories shall conform to ASTM standards D1784-92 and C1063-94. They shall be used where specified by the architect and installed per industry standards and manufacturer's instructions.

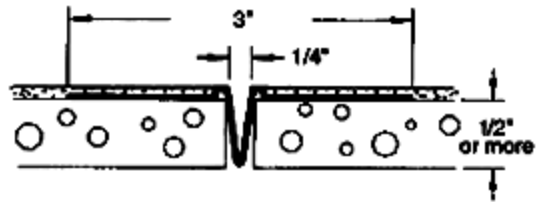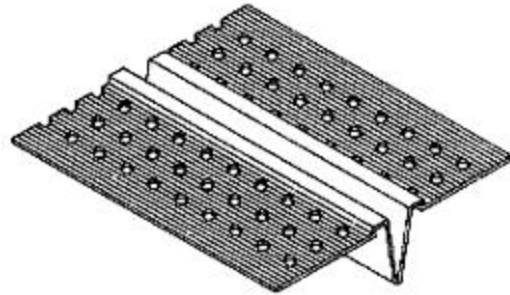

Caulk all butt joints, intersections and ends.  
It is recommended that PVC products be used for all exterior exposures.

