


Direct Applied Finishes


Exterior Channels Reveals

Product #	Dimension A	Dimension B	Pieces/Box
2225	1/2"	1/2" or more	30
2229	5/8"		35
2227	3/4"		35
2226	1"		35
2235	1-1/2"		30
2236	2"		30
2237	3"		20
10' Lengths			

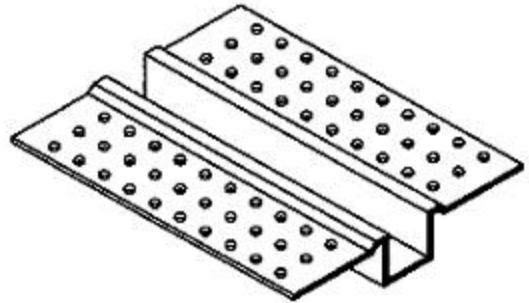

● Application:

Designed for DEFS systems. Perforated flanges are placed on top of separated sheets of sheathing board with "U" channel placed in separated channel. Has built in stops to assure proper thickness of base and finish.

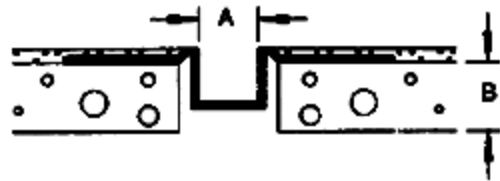

● Specification:

Channel Reveal shall be Plastic Components, Inc. # _____. All exterior accessories shall conform to ASTM standards D1784-92 and C1063-94. They shall be used where specified by the architect and installed per industry standards and manufacturer's instructions.

Caulk all butt joints, intersections and ends.

It is recommended that PVC products be used for all exterior exposures.

