

# Direct Applied Finishes

## Surface Mounted "J" Bead



Product #	Pieces/Box
2201-50	50
2201-58	50
10'Lengths	

### ● Application:

A surface mounted "J" bead design that protects the bottom edge of the sheathing board and eliminates the need of costly back wrapping. Has a wide return flange with striations and perforations to assure a positive bond of base coat to casing bead and surface of sheathing material. Has built in 1/8" stop to assure proper thickness of base and finish.

### ● Specification:

Surface Mounted "J" Bead shall be Plastic Components, Inc. # \_\_\_\_\_. All exterior accessories shall conform to ASTM standards D1784-92 and C1063-94. They shall be used where specified by the architect and installed per industry standards and manufacturer's instructions.

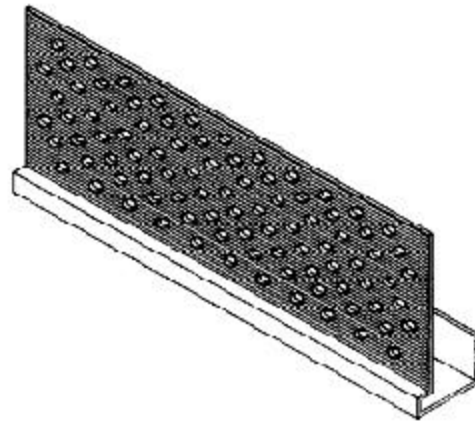

Caulk all butt joints, intersections and ends.  
It is recommended that PVC products be used for all exterior exposures.

