

Direct Applied Finishes

Surface Mounted "L" Bead


Product #	Pieces/Box
2221-50	50
2221-58	50
2221-1	50
10'Lengths	

Application:


A surface mounted "L" bead to be used at windows, doors or any termination point. Extra wide surface flange makes it possible to adjust and fill any gaps caused by short trimming of the sheathing board. Wide flange has striations and perforations to provide a positive bond of base to sheathing board. Has built in 1/8" stop to assure proper thickness of base and finish.

Specification:

Surface Mounted "L" Bead shall be Plastic Components, Inc. # _____. All exterior accessories shall conform to ASTM standards D1784-92 and C1063-94. They shall be used where specified by the architect and installed per industry standards and manufacturer's instructions.

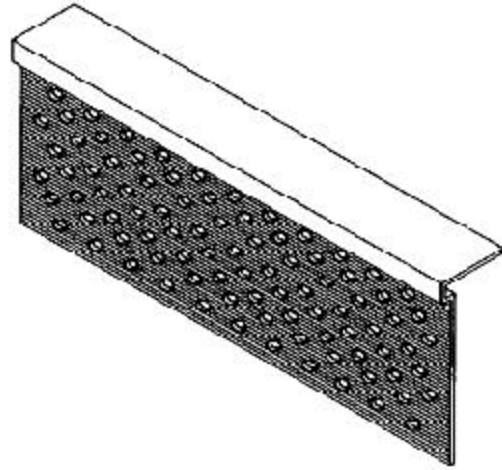

Note: Striations on exposed flanges.



Caulk all butt joints, intersections and ends.
It is recommended that PVC products be used for all exterior exposures.

