


# Stucco and Plaster

## ULTRA-LATH®

Product #	Dimensions/Descriptions	Pieces/Box
PDM2796	ULTRA-LATH®. Rust proof, self-furring, damage resistant. Standard 27" x 96" sheets. 24 lbs. per bundle, 25 bundles per pallet.	10
Also available in 100' rolls.		

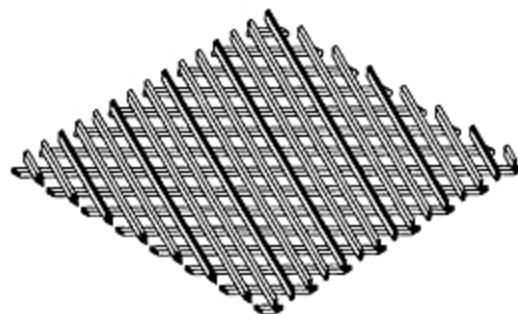

US Patent #s 5,287,673;5,481,843  
SBCCI Report #94182

### ● Application:

For either exterior or interior vertical application; should only be used in non-rated assemblies. The self-furred ridges provide exceptional keying and are applied towards the substrate. ULTRA-LATH is impervious to sand or any harsh chemicals found in portland based stucco. **IT WILL NEVER RUST.** It may be installed over any code approved substrate.

### ● Specification:

ULTRA-LATH shall be Plastic Components, Inc. #PDM2796. It shall be used where specified by the architect and installed per industry standards ASTM C1063-94, SBCCI Report # 94182 and manufacturer's instructions.

Caulk all butt joints, intersections and ends.  
It is recommended that PVC products be used for all exterior exposures.

