
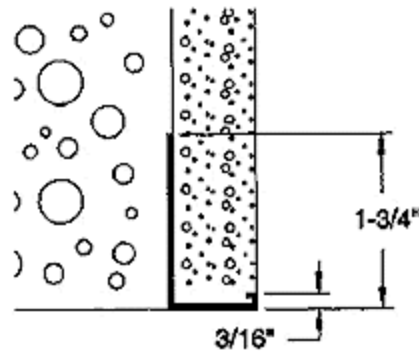


# Stucco and Plaster

## Wide Flange Casing Bead

Product #	Ground	Dimensions/Descriptions	Pieces/Box
1025	1/4"	Wide flange casing bead, 1-3/4" perforated flange.	100
1038	3/8"		100
1050	1/2"		100
1058	5/8"		75
1075	3/4"		75
1078	7/8"		75
1100-0	1"		75
1125-0	1-1/4"		50
1150-0	1-1/2"		50
1200-0	2"		40
Product #	Ground	Dimensions/Descriptions	Pieces/Box
WF1058	5/8"	Oversized, wide flange casing bead, 2-1/4" perforated flange.	75
WF1075	3/4"		75
10' Lengths			

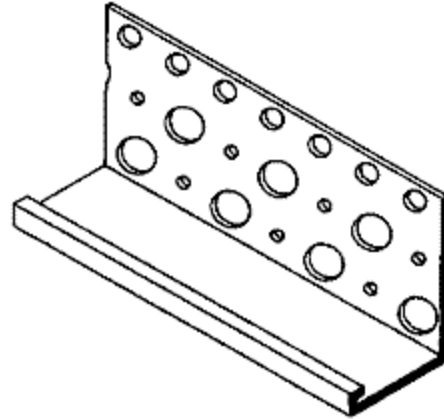

### Application:

To be used at areas where stucco terminates at foundations, windows, doors or any other termination point. Will not rust or dent.

### Specification:

Wide Flange Casing Bead shall be Plastic Components, Inc. # \_\_\_\_\_. All exterior accessories shall be of PVC material conforming to ASTM standards D1784 -92 and C1063-94. They shall be used where specified by the architect and installed per industry standards and manufacturer's instructions.

Caulk all butt joints, intersections and ends.  
It is recommended that PVC products be used for all exterior exposures.

