



High-quality, architecturally pleasing, innovative access doors for walls, ceilings, ducts, floors and roofs



SPECIALTY DOORS

Fully Gasketed Access Door

AS-9000

Application

- Designed to provide a fully gasketed fit in all types of walls and ceilings
- This door is commonly used in clean rooms, laboratories, operating rooms, etc.

Product Features

- Fully gasketed access door
- Formed door panel with reinforced edges and a concealed hinge, along with closed cell gasket between the door and frame

AS-9000 Access Door Specifications:

Door / Door Frame: Stainless Steel or Steel: 18 gage door, 18 gage mounting frame, flange to be 1" wide

Hinge: Concealed

Gasket: Pemko S88 1/8" x 3/8" opened cell gasket

Standard Latch: Stainless steel screwdriver operated cam latch

Optional Latches/Locks: Cylinder lock & key, allen head cam latch, spanner head cam latch

Finish: Stainless steel: #4 satin polish. Steel: 5 stage iron phosphate with prime coat of White alkyd baked-on enamel


Please note the AS-9000 has not been tested for air penetration. For a door that has been tested for Air & Water penetration see the ADWT on page 11.



STANDARD SIZES (Special sizes available upon request)

NOMINAL DOOR SIZE W X H		WEIGHT PER DOOR	
inches	mm	lbs.	kg.
12 X 12	305 X 305	6	2.7
18 X 18	457 X 457	11.5	5.1
24 X 24	610 X 610	19	8.4
24 X 36	610 X 914	28	12.4

Wall or ceiling opening is nominal door size + 3/8" (9 mm)
For detailed specifications see submittal sheet

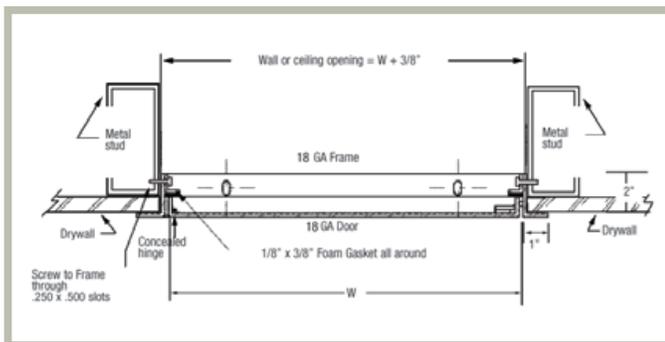

FOR MORE INFORMATION CALL 1-888-926-1365
Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com