



**NON-INSULATED FIRE RATED ACCESS DOOR  
WITH DRYWALL BEAD  
Model KRP-450FR  
For Walls Only**



**KARP ASSOCIATES, INC.**

DATE

**SPECIFICATIONS**

**GENERAL SCOPE:**

Classified access frame and fire door assembly 1 1/2 hour  
"B" Label Underwriters Laboratories File # A-10806.  
Warnock Hersey File # U51466.

**CONSTRUCTION:**



1. Frame shall be 16 gage steel, 1" wide, surrounded by galvanized drywall bead.
2. Door shall be 16 gage steel, and shall open to 175°, be self-latching with automatic closer and interior latch release.
3. Hinge shall be continuous piano hinge.
4. Latches shall be spring loaded sliding bolt type, keyed paddle latch, all keyed alike. Door can be prepared for a rim cylinder lock.
5. Finish shall be prime coat of rust inhibitive electrostatic powder, baked white enamel. Stainless steel doors shall have #4 satin finish.

**STANDARD SIZES**

DOOR SIZE H X W (IN.)	WALL OPENING (IN.)	NUMBER OF LATCHES	SHIP WT. (LBS.)
8 x 8	8 3/8 x 8 3/8	1	4.3
12 x 12	12 3/8 x 12 3/8	1	7.2
14 x 14	14 3/8 x 14 3/8	1	8.3
16 x 16	16 3/8 x 16 3/8	1	9.9
18 x 18	18 3/8 x 18 3/8	1	11.7
24 x 24	24 3/8 x 24 3/8	1	17.4
30 x 22	30 3/8 x 22 3/8	1	19.1
30 x 30	30 3/8 x 30 3/8	1	23.9
36 x 24	36 3/8 x 24 3/8	2	24.1
36 x 36	36 3/8 x 36 3/8	2	33.5

PROJECT DATA					
Project Name:					
Architect:					
Contractor:					
Agent/Customer Name:					
Tagging Instructions:					
Special Instructions:					

PROJECT SCHEDULE					
Qty.	H	W	No. of Latches	Finish	Remarks

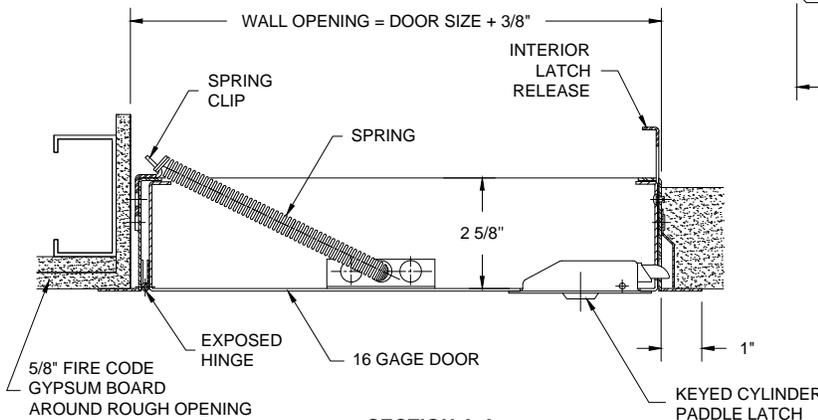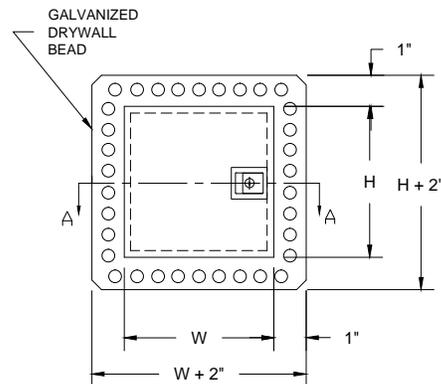

**Made with Union Labor**



**FOR MORE INFORMATION CALL 1-888-926-1365**  
 Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com