

Strike First Corporation of America

SN-SONOMA Series Extinguisher and Valve Cabinets

Detail & Submittal Sheet

SONOMA Series (SN) cabinet fronts are 18 gauge cold rolled steel with 22 gauge cold rolled steel tubs, are fully recessed and have a concealed hinge. The Sonoma's aesthetically clean and trim appearance blends in with any decor. The cabinet design and appearance is superior for use in ultra modern interior designed commercial facilities. All Sonoma cabinets come standard with flush Sonoma handle.

SPECIFICATION PROCESS: Follow the steps below to specify your cabinet. See detail legend on page 3.

- STEP 1: EXTINGUISHER SIZE:**
1 - 10 lb. 2 - 20 lb.
- STEP 2: CABINET STYLE:**
2 - Fully-Recessed (FR)
- STEP 3: DOOR STYLE:**
7 - Full Metal (FM)
8 - Vertical Duo (VD)
- STEP 4: SERIES:**
SN - Sonoma Cabinet
VC - Valve Cabinet
- STEP 5: CABINET TYPE:**
SG - SAFEGUARD - Fire Rated
- STEP 6: FINISH OPTIONS:**
 SSF - Stainless Steel Front
 FSS - Full Stainless Steel
 BT - Black Tub
- STEP 7: HANDLE OPTIONS:**
 013 - Sonoma Stainless Steel Flush Handle (Standard)
- STEP 8: GLAZING:**
 G10 - Double Strength Glass
 G11 - Clear Acrylic (Standard)
 G12 - Clear Tempered Glass
 G13 - Single Strength Glass
- STEP 9: LETTERING:**
 004 - Decal "Fire Ext." Lrg Vert R/B

Project: _____

Specification Reference: _____

Model Number: _____ Quantity: _____

Architect: _____




Contractor: _____

Distributor: _____

Approved By: _____

Date: _____


Safeguard fire rated assembly

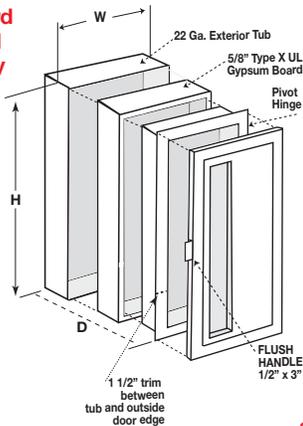


SAFEGUARD Sonoma Series VC-SN Valve Cabinet Knockout Drilling: No knockouts are provided with Sonoma Safeguard Valve Cabinets. Find the exact location of the pipe(s) which enter the cabinet and mark the cabinet tub appropriately. Both outside and inside tubs and insulation material must be completely open to receive pipe(s).

SAFEGUARD Fire Rated Installation

ONE HOUR FIRE WALL SYSTEM

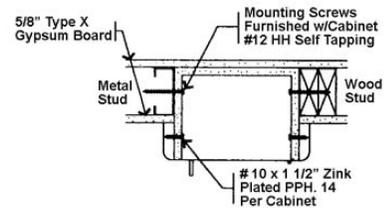

TWO HOUR FIRE WALL SYSTEM

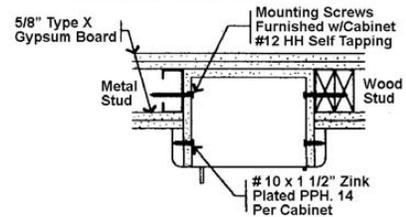

WARNOCK HERSEY LISTED UL Classified 5/8" Type X gypsum board inserted in the cavity between the two layers. Warnock Hersey has approved the Safeguard Cabinets to be mounted in any face of fire rated steel or wood stud for up to 2 hour rated walls without affecting its fire rating. The above meets the requirement test ASTM-E119-98 with test report WHI-495-1534. MOUNTING INSTRUCTIONS are supplied with each safeguard cabinet.

✓	Mod. #	Trim Style	Interior Tub Size			Overall Outside Trim		Rough Opening			SAFEGUARD Rough Opening			Knockout Location		Accom. Ext Size
			W	H	D	W	H	W	H	D	W	H	D	A	B	Lbs.
Fully-Recessed																
	127-SN	trimless	9 1/2"	24"	6"	13 1/4"	27 3/4"	9 3/4"	24 1/4"	5 3/4"	11 1/2"	26"	6 3/4"	-	-	10
	128-SN	trimless	9 1/2"	24"	6"	13 1/4"	27 3/4"	9 3/4"	24 1/4"	5 3/4"	11 1/2"	26"	6 3/4"	-	-	10
	227-SN	trimless	12"	27"	8"	15 3/4"	30 3/4"	12 1/4"	27 1/4"	7 3/4"	13 1/2"	28 3/4"	8 3/4"	-	-	20
	228-SN	trimless	12"	27"	8"	15 3/4"	30 3/4"	12 1/4"	27 1/4"	7 3/4"	13 1/2"	28 3/4"	8 3/4"	-	-	20
Valve Cabinet																
	VC-SN	trimless	18"	18"	8"	20 3/4"	20 3/4"	19 1/4"	18 1/4"	8"	20"	20"	9"	9"	4"	Angle Valve 2 1/2"

SFCA 2010

