


Stealth Round Access Panel

Glass Fiber Reinforced Gypsum Access Panels for Ceilings

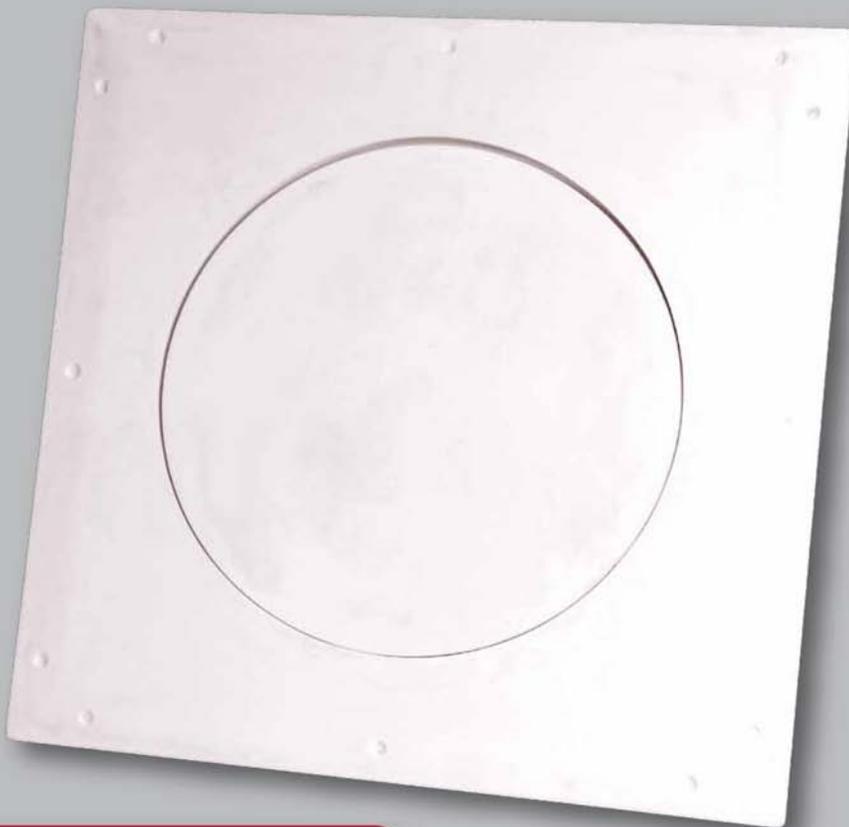

Description

Compliment any design by using our exclusive GFRG Round Stealth Access Panel.

The innovative round Stealth Access Panel by Wind-lock® is made of GFRG (glass fiber reinforced gypsum). They are designed to blend seamlessly into a drywall ceiling when circular light fixtures, speakers, or smoke detectors are being used to maintain the aesthetic theme in the design.



FOR MORE INFORMATION CALL 1-888-926-1365
 Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com

Stealth Round Access Panel

Glass Fiber Reinforced Gypsum Access Panels for Ceilings



Features

- Tapered edge for tape joint
- Easily textured
- Lightweight
- Blends into surrounding drywall
- No shrinking or cracking
- Single trade installation
- Pre-spotted fastener holes
- Reduce labor costs




Sizes

Part Code	Access Opening	Rough Opening
TR-RAP012	12" diameter	18" x 18"
TR-RAP016	16" diameter	22" x 22"
TR-RAP018	18" diameter	24" x 24"
TR-RAP024	24" diameter	30" x 30"

Custom sizes are available. Call for more information.




FOR MORE INFORMATION CALL 1-888-926-1365
 Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com

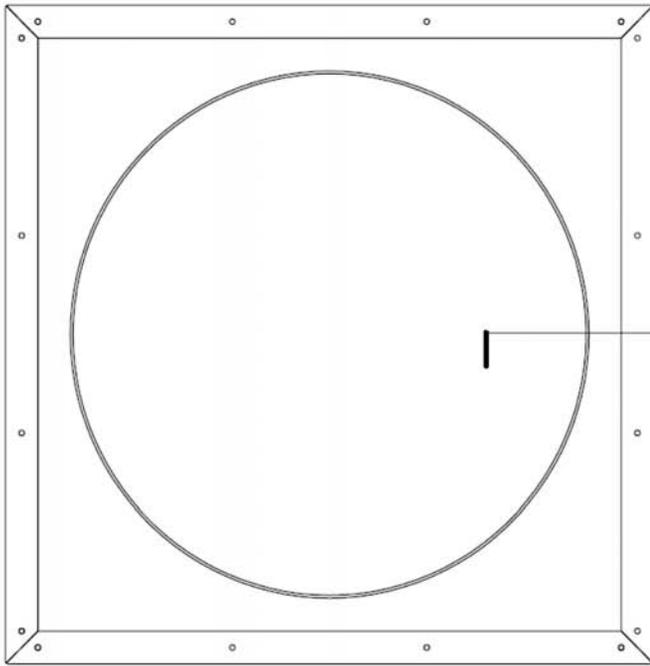

Door Size Legend	
12" diameter	
16" diameter	
18" diameter	
24" diameter	

All Stealth Panels are 5/8" thick with an 1/8" tapered edge

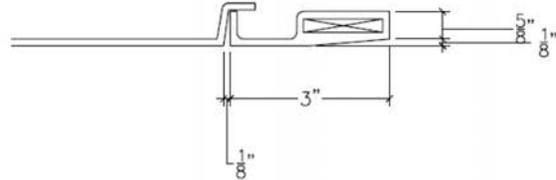

1 *Typ. Round AP*
Scale: NTS

2 *Frame/Door Section*
Scale: NTS



TITLE: *Typ. GFRG Round AP*

DRAWN BY: G.M.C.	JOB#: WINDLOCK	SHEET#: WL1
DATE: 4/21/09	REV: REVISION	SCALE: AS NOTED


This drawing is the property of Wind-lock® Corp and shall not be reproduced, copied, lent or disposed of directly or indirectly nor used for any purpose other than that for which it is specifically furnished. Reproduction or use of this document without written permission of Wind-lock Corp® is illegal and will be prosecuted under the law.



FOR MORE INFORMATION CALL 1-888-926-1365
 Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com



Name: _____
 Company: _____
 Bill to Address: _____
 City: _____
 State/Zip: _____
 Phone: _____
 Fax: _____
 Email: _____



Item/Part Code	Product Description	Qty
Standard Stealth		
TR-AP009	Stealth Access Panel 9x9	
TR-AP012	Stealth Access Panel 12x12	
TR-AP016	Stealth Access Panel 16x16	
TR-AP018	Stealth Access Panel 18x18	
TR-AP024	Stealth Access Panel 24x24	
TR-APGR2230	Stealth Access Panel-Residential w/ Gasket 22x30	
TR-APGR3030	Stealth Access Panel-Residential w/ Gasket 30x30	
Hinged Stealth		
TR-HAP009	Hinged Stealth Access Panel 9x9	
TR-HAP012	Hinged Stealth Access Panel 12x12	
TR-HAP016	Hinged Stealth Access Panel 16x16	
TR-HAP018	Hinged Stealth Access Panel 18x18	
TR-HAP024	Hinged Stealth Access Panel 24x24	
Round Stealth		
TR-RAP012	Round Stealth Access Panel 12x12	
TR-RAP016	Round Stealth Access Panel 16x16	
TR-RAP018	Round Stealth Access Panel 18x18	
TR-RAP024	Round Stealth Access Panel 24x24	



FOR MORE INFORMATION CALL 1-888-926-1365
 Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com

HOW TO WORK WITH ACCESS PANELS



1. Frame the opening.



2. Mount Stealth surround with drywall screws.



3. Install drywall and place access panel in opening.




4. Tape and apply drywall compound.



5. Apply desired finish.

STEALTH PANELS TECHNICAL DATA

Shell Thickness	1/8" to 3/16"
Fastener Test Pull Out (wood stud)	525 lb avg.
Fastener Test Pull Out (metal stud)	215 lb avg.
Fastener Push Through Test	350 lb avg.
Fuel Contribution (ASTM E84-80)	0
Flame Spread (ASTM E84-80)	0
Smoke Index (ASTM E84-80)	5
Combustion (ASTM E84-80)	Non-combustible
Class A Non-Rated	—
CSI Code	CSI #08310

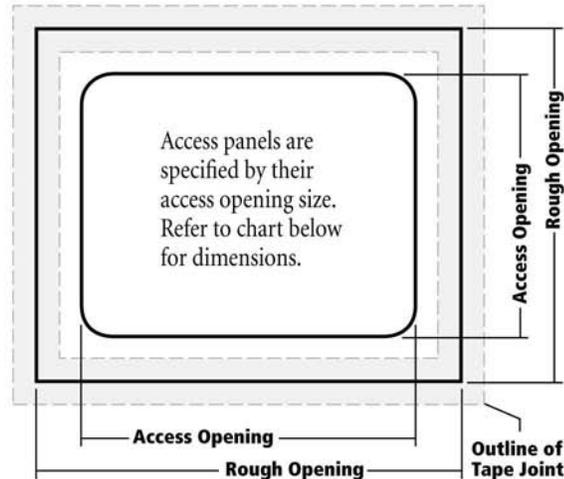

ORDERING INFORMATION

Part Code	Access Opening	Rough Opening
-----------	----------------	---------------

COMMERCIAL ACCESS PANELS

TR-AP009*	9" x 9"	15" x 15"
TR-AP012*	12" x 12"	18" x 18"
TR-AP016*	16" x 16"	22" x 22"
TR-AP018*	18" x 18"	24" x 24"
TR-AP024*	24" x 24"	30" x 30"

RESIDENTIAL ACCESS PANELS (with gasket)

TR-APGR2230*	22" x 30"	24" x 36"
TR-APGR3030*	30" x 30"	36" x 36"

SPECIALTY ROUND PANELS

TR-RAP012*	12" diameter	18" x 18"
TR-RAP016*	16" diameter	22" x 22"
TR-RAP018*	18" diameter	24" x 24"
TR-RAP024*	24" diameter	30" x 30"

HINGED ACCESS PANELS

TR-HAP009*	9" x 9"	15" x 15"
TR-HAP012*	12" x 12"	18" x 18"
TR-HAP016*	16" x 16"	22" x 22"
TR-HAP018*	18" x 18"	24" x 24"
TR-HAP024*	24" x 24"	30" x 30"

* Sold 2 per box. Custom sizes available. Call for more details.



Stock to Dock Shipping Guarantee

Products highlighted in yellow are guaranteed to ship within 24 hours or freight costs are **FREE!** Larger orders may require additional lead times. Call for details.



Now available in Round and Hinged.



FOR MORE INFORMATION CALL 1-888-926-1365
 Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com



BASIC CARE AND INSTALLATION INSTRUCTIONS

◆ Basic information: Keep the frame and door together. If you need to separate the panel from the frame be sure to mark it to match the frame it came with and store in a safe area (see storage).

◆ Storage: Store all panels vertically in a safe, cool, dry place.



◆ Round Stealth Panel Installation: Be sure the door is in the frame during installation or above the frame while installing the frame. The door will not fit into the frame once the drywall is in place.

◆ Installation: Additional framing required. Install with a #6 bugle head screw using pre-spotted screw holes. Joints are taped with standard drywall tape and joint compound.

