
ROOF ACCESSORIES - FARHRENHEIT™ SERIES SMOKE VENT - RVF

Our UL 793 listed double door smoke vents automatically open during a fire with a heat responsive device, releasing harmful smoke and fumes. Smoke vents are required as referenced in International Building Code section 410 for stages, platforms and technical production areas and section 910 for smoke and heat removal in storage and warehouse occupancies.

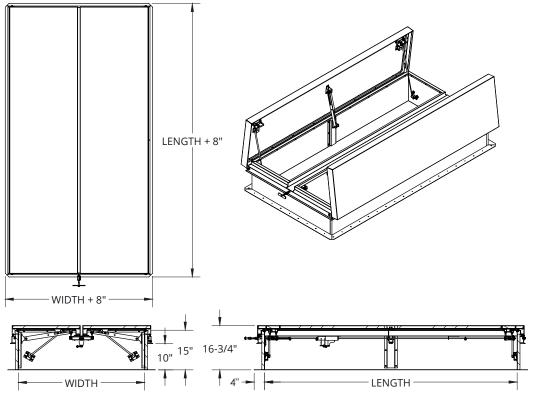

SPECIFICATIONS:

Material:

Curb: 14 gauge galvanneal steel

Cover: 11 gauge aluminum with 18 gauge aluminum

cover liner

Finish: Silver textured powder coat paint

Gasket: Continuous, weatherproof EPDM sponge rubber

adhesive-backed seal

Insulation: 1" polyisocyanurate (R-6) on curb and in cover

Hinge: Heavy-duty aluminum hinge with bolt pin

Hold-Open Arm: Clear zinc-plated steel hold-open arm

Latch: Rotary latch mechanism designed to hold covers closed against 90psf wind uplift. Opens manually with internal and external manual pull handles and automatically with

fusible link

Fusible Link: 165° UL 33 listed fusible link

Spring: Gas springs with dampers automatically open against 10PSF snow load

Sizes:

Minimum: 48" x 48"

Maximum: 48" x 96"

ROOF OPENING = ORDER SIZE

CERTIFICATIONS:

UL 793 listed and labeled up to 48" x 96"

OPTIONS & ACCESSORIES:

Options: Double wall curb, curb mount, 2" polyisocyanurate curb and cover, electrical/thermal McCabe® links, various fuse link temperatures

Accessories: Security grille



 Distributor:
 Project:

 Contractor:
 Approved By:

 Date:
 Architect:

 Scale: N/A
 Pages: 1 of 2
 Item #:

2023 Activar Construction Products Group, Inc.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, IN

6-25-2024



FOR MORE INFORMATION CALL 1-888-926-1365

ROOF ACCESSORIES - FARHRENHEIT™ SERIES SMOKE VENT - RVF

COMMON SIZES

QTY	MODEL	CURB OPENING Width x Length	WEIGHT Lbs.		
	RVFGA-4848ST	48" x 48"	225		
	RVFGA-4860ST	48" x 60"	250		
	RVFGA-4872ST	48" x 72"	275		
	RVFGA-4890ST	48" x 90"	315		
	RVFGA-4896ST	48" x 96"	330		

More sizes available upon request

MADE-TO-ORDER RVF - EXAMPLE: RVFGA-4860ST-ITL2LO

QTY	MODEL	MATERIAL -	WIDTH (max 48")	LENGTH (max 96")		FINISH*		OPTIONS		IONAL BE® LINK	ME		ONAL FUSE LINK
	RVF	GA Steel Curb, Aluminum Cover			ST	Powder Coat Silver Textured	CD	Double wall curb	L165L	165° F 24VDC		L212	212° F
						ditional UL 1332 approved finish colors ilable upon request	СМ	Curb mount	L165H	165° F 115VAC		L280	280° F
							IT	2" polyisocyanurate on curb	L212L	212° F 24VDC		L350	350°F
							ITT	2" polyisocyanurate on curb & cover	L212H	212°F 115VAC		L360	360° F
									L285L	285° F 24VDC		L370	370° F
									L285H	285° F 115VAC		L386	386° F
								!				L450	450° F



SECURITY GRILLE, ORDERED SEPARATELY MADE-TO-ORDER - EXAMPLE: RSGD-4896ST

QTY		MODEL				
	RSGD	Drop-in grille 1/2" diameter spaced 6" x 12"				
	RSGB	Bolt-in grille 1/2" diameter spaced 6" x 12"				
		-	- 1			

Size (W x H)		FINISH
4848 (48" x 48")	ST	Silver Textured
4872 (48" x 72")		
4890 (48" x 90")		
4896 (48" x 96")		

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

© 2023 Activar Construction Products Group, Inc.

INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT WRITTEN PERMISSION IS PROHIBITED. Page 2 of 2



FOR MORE INFORMATION CALL 1-888-926-1365