


SUBMITTAL: CROWLINE™ FIRE-FX2 VALVE & HOSE CABINETS - ALUMINUM

Fire-Rated Crowline Cabinets Provide A Wide Selection of Door Styles, Glazing and Sizes. These Durable Cabinets are Designed to Industry Standards for Fire Department Valves, Fire Hose Rack Units and Extinguishers.

Door & Trim: Clear anodized aluminum. 1-3/4" Trim on face and door. These flush cabinet doors are mounted in a 5/8" door stop, are attached by a continuous hinge and are equipped with zinc-plated handle and roller catch for all non-locking doors. Theft-deterrent SAF-T-LOK™ also available.

Trim Style and Depth: 1-3/4" face trim on frame and 1- 1/4" trim on door. *Recessed* - 3/8" flat trim. *Semi-recessed* - 1-1/4" Square Edge or 2-1/2" Rolled Edge. See separate submittal for trimless models. Rolled edge models are constructed of mechanically-joined extrusions. See photo at right.



2-1/2" Rolled Edge


Tub: The double tub is constructed of cold rolled steel with white powder-coat finish standard. Tub forms a flange to cover cut edges of wallboard material.

Fire-resistant material is sandwiched between the layers of steel. *Please note that dimensions for wall opening have changed in 2015. See Chart on pg 2.*


Knockouts: Knockouts are not provided on Fire-Rated Cabinets. Instructions for Knockouts in the field are provided and must be strictly adhered to, to maintain fire rating.

Special Features: Models 8025, 8026, 8027 & 8023 have a shelf 12" from the bottom of the cabinet and are designed to hold a fire extinguisher plus FD valve or other accessory. Those models can also be ordered without shelf to allow for lower mounting height of valve piping to meet NFPA10.

Fire-Rating: Fire-FX2™ cabinets are fabricated in accordance with the UL label for one and two hour combustible and non-combustible wall system building codes. The fire testing has met the requirement of ANSI/UL 1479 (ASTM -E814) and ULC/CAN S115-for membrane and penetration firestops. Installation instructions must be strictly adhered to in order to obtain the fire rating.

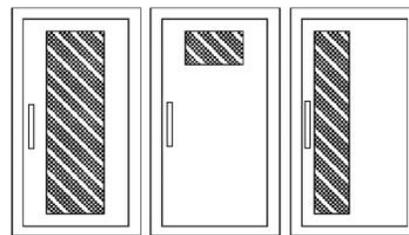

F - Full glass with pull handle
 G - Full glass with pull handle & Saf-T-Lok
 D - Horizontal duo panel with pull handle
 E - Horizontal duo panel with pull handle & Saf-T-Lok
 V - Vertical duo panel with pull handle
 W - Vertical duo panel with pull handle & Saf-T-Lok

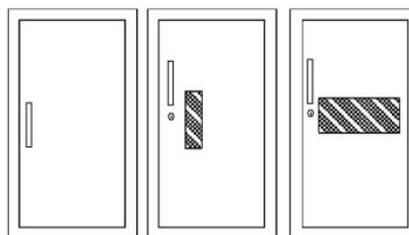

S21 - Solid with pull handle
 L22 - Solid with pull handle & Saf-T-Lok
 B - Solid with pull, small view window and Saf-T-Lok
 A - Center duo panel with pull and Saf-T-Lok

STEP 1: SELECT MODEL NUMBER, TRIM & QUANTITY (Refer to Chart on Page 2)


STEP 2: SELECT DOOR STYLE WITH HANDLE (Check one box below)

- | | |
|---|---|
| <input type="checkbox"/> F Full Glazing | <input type="checkbox"/> L22 Solid with SAF-T-LOK™ |
| <input type="checkbox"/> G Full Glazing with SAF-T-LOK™ | <input type="checkbox"/> V Vertical Duo |
| <input type="checkbox"/> D Horizontal Duo Panel | <input type="checkbox"/> W Vertical Duo with SAF-T-LOK™ |
| <input type="checkbox"/> E Horizontal Duo Panel with SAF-T-LOK™ | <input type="checkbox"/> B Solid w/Small View Window & SAF-T-LOK™ |
| <input type="checkbox"/> A Center Duo Panel with SAF-T-LOK™ | <input type="checkbox"/> L24 Solid with Cylinder Lock & No Handle |
| <input type="checkbox"/> S21 Solid Door | |

[View Door Styles](#)

STEP 3: SELECT DOOR GLAZING (Check one box below)

- | | |
|---|--|
| <input type="checkbox"/> 10 Clear Acrylic | <input type="checkbox"/> 16 Gray Acrylic |
| <input type="checkbox"/> 13 Clear Wire Glass with Safety Film | <input type="checkbox"/> 17 Clear Tempered Glass |
| <input type="checkbox"/> 15 Bronze Acrylic | <input type="checkbox"/> 18 Laminated Safety Glass |

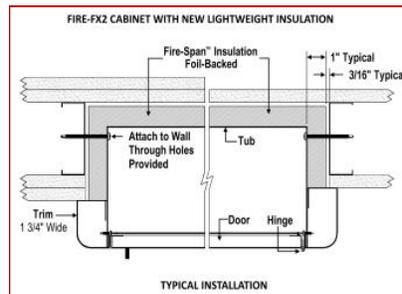

STEP 4: OPTIONAL FEATURES AT ADDITIONAL COST:

- | | | |
|---|---|---|
| <input type="checkbox"/> Dark Bronze Anodized Door & Trim (pull to match) | <input type="checkbox"/> P6 Polished Chrome Lever Handle | <input type="checkbox"/> Black Vertical FE Letters LDCVBF |
| <input type="checkbox"/> Optional Tub Color: ___ Black ___ Red | <input type="checkbox"/> FDVO Decal "Fire Dept Valve" Octagonal 6 x 6" | <input type="checkbox"/> Red Vertical FE Letters LDCVRF |
| <input type="checkbox"/> PUF Futura "Fire" Handle | <input type="checkbox"/> 1403 Decal "Fire Hose" Vert. Blk Bkgd, Red Letters 4 x 9 | <input type="checkbox"/> White Vertical FE Letters LDCVWF |
| <input type="checkbox"/> 0710 ADA Flush Pull Handle | <input type="checkbox"/> DCHFDV-R Diecut "Fire Dept Valve" Horiz. 10-3/4 x 4-3/8 | <input type="checkbox"/> Black Horizontal FE Letters LDCHBF |
| <input type="checkbox"/> P6 Polished Chrome Lever Handle | <input type="checkbox"/> DCVRFDV Diecut "Fire Dept Valve" Vert 3/4: x 17" | <input type="checkbox"/> Red Horizontal FE Letters LDCHRF |
| <input type="checkbox"/> BA Brigadier Alarm | Use separate submittals for specialty lettering | <input type="checkbox"/> White Horizontal FE Letters LDCHWF |
| <input type="checkbox"/> CA Commander Alarm | Etched or Engraved Lettering - Metal/Glass | View Anodized Finishes Online |

For More Options, Visit These Links to Separate Submittals: [Decals & Die Lettering](#), [Alarms](#), [Pulls & Levers](#), [Fire Extinguishers](#), [Fire Hose Racks](#),



[BIM OBJECTS FOR REVIT® PLATFORM](#)

<p>ACTIVAR INC. CONSTRUCTION PRODUCTS GROUP</p> <p>JL INDUSTRIES CROWLINE™ AND SAF-T-LOK™ ARE TRADEMARKS OF ACTIVAR PLEASE DOWNLOAD MOST CURRENT SUBMITTAL BEFORE ORDERING</p>	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date:
	10/10/16	



FOR MORE INFORMATION CALL 1-888-926-1365
 Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com

SUBMITTAL: CROWNLINER FX VALVE & HOSE CABINETS - ALUMINUM

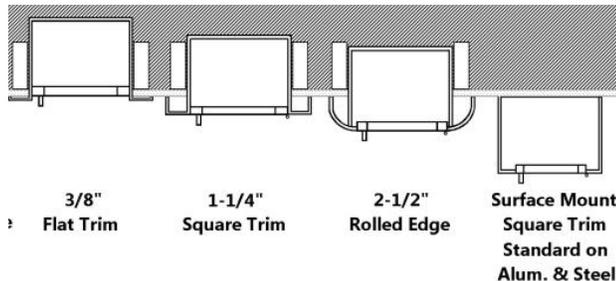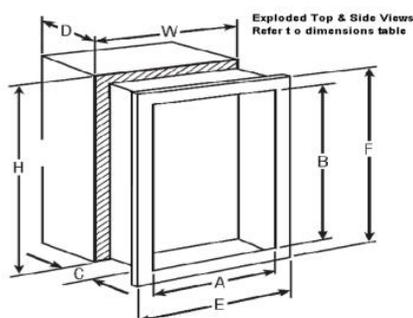

ADA Cabinet Mounting Height:
Standard Pull on G, E, W, L22 and B Door Styles with Saf-T-Lok are 3 5/8" Higher than Door Center, so Allow for that When Mounting Cabinet.
Standard Pull with No Lock or ADA Recessed Pull are Centered on Door.

• Meet ADA 4" Projection Requirement

TRIM & DOOR MATERIAL & SERIES		TUB I.D. W x H x D in Inches			FRAME O.D.		FX Wall Opening New Dimensions 2015 -			RECOMMENDED HOSE RACK, FIRE DEPARTMENT VALVES & EXTINGUISHERS	
QTY	#	TRIM STYLE	A	B	C	E	F	Width	Height		Depth
Cabinets with Hose Rack & Extinguisher or FD Valve											
6025		FLAT TRIM 3/8" •	24	30	6	27 3/8	33 3/8	26 5/16	32 5/16	6 15/16	HOSE RACK: 1- 1/2" x 1-1/2" Hose Rack Unit, 50 or 75' Hose (3005, 3105, 3007, 3107) plus Cosmic 2.5 or Galaxy 2.5-5 lb Extinguisher
6026		1-1/4" SQUARE EDGE •	24	30	6	27 3/8	33 3/8	26 5/16	32 5/16	5 15/16	
6027		2-1/2" ROLLED EDGE •	24	30	6	27 3/8	33 3/8	26 5/16	32 5/16	5 5/16	
6225		FLAT TRIM 3/8" •	24	34 3/4	6	27 3/8	38 1/8	26 5/16	37 1/16	6 15/16	HOSE RACK: 1- 1/2" x 1-1/2" Hose Rack Unit - 100' Hose (3010 or 3110) plus Cosmic 2.5 or Galaxy 2.5-5 lb Exting.
6226		1-1/4" SQUARE EDGE •	24	34 3/4	6	27 3/8	38 1/8	26 5/16	37 1/16	5 15/16	
6227		2-1/2" ROLLED EDGE •	24	34 3/4	6	27 3/8	38 1/8	26 5/16	37 1/16	5 5/16	
6125		FLAT TRIM 3/8" •	24	30	8	27 3/8	33 3/8	26 5/16	32 5/16	8 15/16	HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit 50 or 75' Hose (3205, 3207)
6126		1-1/4" SQUARE EDGE •	24	30	8	27 3/8	33 3/8	26 5/16	32 5/16	7 15/16	
6127		2-1/2" ROLLED EDGE •	24	30	8	27 3/8	33 3/8	26 5/16	32 5/16	7 5/16	
6425		FLAT TRIM 3/8" •	24	34 3/4	8	27 3/8	38 1/8	26 5/16	37 1/16	8 15/16	HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit - 100' Hose (3210 Series)
6426		1-1/4" SQUARE EDGE •	24	34 3/4	8	27 3/8	38 1/8	26 5/16	37 1/16	7 15/16	
6427		2-1/2" ROLLED EDGE •	24	34 3/4	8	27 3/8	38 1/8	26 5/16	37 1/16	7 5/16	
6625		FLAT TRIM 3/8" •	24	38 3/4	8	27 3/8	42 1/8	26 5/16	41 1/16	8 15/16	HOSE RACK: 2-1/2" x 1-1/2" Hose Rack Unit - 125' Hose (3212 Series)
6626		1-1/4" SQUARE EDGE •	24	38 3/4	8	27 3/8	42 1/8	26 5/16	41 1/16	7 15/16	
6627		2-1/2" ROLLED EDGE •	24	38 3/4	8	27 3/8	42 1/8	26 5/16	41 1/16	7 5/16	
6325		FLAT TRIM 3/8" •	30	30	8	33 3/8	33 3/8	32 5/16	32 5/16	8 15/16	HOSE RACK & FD VALVE OR EXTINGUISHER: 50' or 75' Hose Rack Unit / -1-1/2" or 2-1/2" Valve/ Exting.(Not Sentinel 15-20, 272)
6326		1-1/4" SQUARE EDGE •	30	30	8	33 3/8	33 3/8	32 5/16	32 5/16	7 15/16	
6327		2-1/2" ROLLED EDGE •	30	30	8	33 3/8	33 3/8	32 5/16	32 5/16	7 5/16	
6525		FLAT TRIM 3/8" •	32 3/4	34 3/4	8	36 1/8	38 1/8	35 1/16	37 1/16	8 15/16	HOSE RACK & FD VALVE OR EXTINGUISHER: 100' Hose Rack Unit/1-1/2" or 2-1/2" Valve/ Extinguisher.(Not Sentinel 15-20, 272)
6526		1-1/4" SQUARE EDGE •	32 3/4	34 3/4	8	36 1/8	38 1/8	35 1/16	37 1/16	7 15/16	
6527		2-1/2" ROLLED EDGE •	32 3/4	34 3/4	8	36 1/8	38 1/8	35 1/16	37 1/16	7 5/16	
7225		FLAT TRIM 3/8" •	32 3/4	38 3/4	8	36 1/8	42 1/8	35 1/16	41 1/16	8 15/16	HOSE RACK & FD VALVE OR EXTINGUISHER: 125' Hose Rack Unit/1-1/2" or 2-1/2" Valve/ Extinguisher (Not Sentinel 15-20, 272)
7226		1-1/4" SQUARE EDGE •	32 3/4	38 3/4	8	36 1/8	42 1/8	35 1/16	41 1/16	7 15/16	
7227		2-1/2" ROLLED EDGE •	32 3/4	38 3/4	8	36 1/8	42 1/8	35 1/16	41 1/16	7 5/16	
Cabinets for Fire Department Valves											
8525		FLAT TRIM 3/8" •	18	18	8	21 3/8	21 3/8	20 5/16	20 5/16	8 15/16	FIRE DEPARTMENT VALVE: 1-1/2" or 2-1/2" Fire Department Valve with Cap and Chain
8526		1-1/4" SQUARE EDGE •	18	18	8	21 3/8	21 3/8	20 5/16	20 5/16	7 15/16	
8527		2-1/2" ROLLED EDGE •	18	18	8	21 3/8	21 3/8	20 5/16	20 5/16	7 5/16	
8425		FLAT TRIM 3/8" •	18	18	10	21 3/8	21 3/8	20 5/16	20 5/16	10 15/16	DUAL SIDE BY SIDE FIRE DEPARTMENT VALVE & EXTINGUISHER OR 2 FIRE DEPARTMENT VALVES: 1-1/2" or 2-1/2" FD Valve w/Cap and Chain Plus Extinguisher - Cosmic & Galaxy 2.5-10, Mercury 2.5-11, Grenadier, Saturn 15-25, Sentinel 5
8426		1-1/4" SQUARE EDGE •	18	18	10	21 3/8	21 3/8	20 5/16	20 5/16	9 15/16	
8427		2 1/2" ROLLED EDGE •	18	18	10	21 3/8	21 3/8	20 5/16	20 5/16	9 5/16	
8725		FLAT TRIM 3/8" •	26	26	8	29 3/8	29 3/8	28 5/16	28 5/16	8 15/16	DUAL EXTINGUISHER & FD VALVE CABINET W/SHELF: Shelf is 12" from bottom. Any Extinguisher Except Sentinel 15-20, 272
8726		1-1/4" SQUARE EDGE •	26	26	8	29 3/8	29 3/8	28 5/16	28 5/16	7 15/16	
8727		2-1/2" ROLLED EDGE •	26	26	8	29 3/8	29 3/8	28 5/16	28 5/16	7 5/16	
8625		FLAT TRIM 3/8" •	26	26	10	26 1/4	26 1/4	28 5/16	28 5/16	10 15/16	
8626		1-1/4" SQUARE EDGE •	26	26	10	26 1/4	26 1/4	28 5/16	28 5/16	9 15/16	
8627		2 1/2" ROLLED EDGE •	26	26	10	26 1/4	26 1/4	28 5/16	28 5/16	9 5/16	
8025		FLAT TRIM 3/8" •	16	40	9	19 3/8	43 3/8	18 5/16	42 5/16	9 15/16	
8026		1-1/4" SQUARE EDGE •	16	40	9	19 3/8	43 3/8	18 5/16	42 5/16	8 15/16	
8027		2-1/2" ROLLED EDGE •	16	40	9	19 3/8	43 3/8	18 5/16	42 5/16	8 5/16	



FOR MORE INFORMATION CALL 1-888-926-1365
 Superior Specialty Supply • 9 Council Drive • PO Box 417 • Woodsboro, MD 21798 • www.sssupply.com