



# Stucco and Plaster

## Three Piece Soffit Vent



Product #	Ground	Dimensions/Descriptions	Pieces/Box
550-38	3/8"	Three part soffit vent with removable 2-5/8" vent. 1-3/4" vent may be substituted. Up to 15 square inches of free air flow per linear foot.	15
550-50	1/2"		13
550-58	5/8"		11
550-75	3/4"		11
550-78	7/8"		11

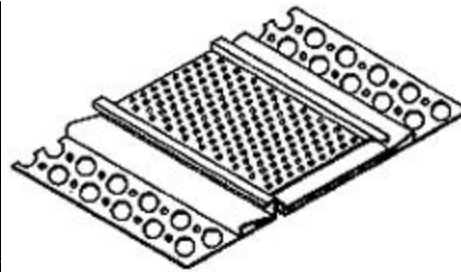


Product #	Ground	Dimensions/Descriptions	Pieces/Box
4550-38	3/8"	Three part soffit vent with removable 4" vent. 3" vent may be substituted. Up to 16 square inches of free air flow per linear foot.	15
4550-50	1/2"		13
4550-58	5/8"		11
4550-75	3/4"		11
4550-78	7/8"		11



550



4550

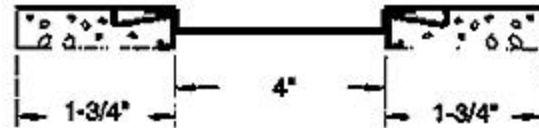

### Application:

This product consists of three parts; two stucco stops and a removable vent. The vent can be removed before stucco is applied, keeping the vent clean and eliminating the need for masking. Connector clips included.

### Specification:

Three Piece Soffit Vent shall be Plastic Components, Inc. # \_\_\_\_\_. All exterior accessories shall be of PVC material conforming to ASTM standards D1784 -92 and C1063-94. They shall be used where specified by the architect and installed per industry standards and manufacturer's instructions.

Caulk all butt joints, intersections and ends.  
It is recommended that PVC products be used for all exterior exposures.

